

G.V.W.R.	9,990#	Axle	(2) 5,200# EZ Lube w/Electric Brakes	
G.A.W.R. (Ea. Axle)	5,080#	Suspension	Multi-Leaf Spring w/Equalizer	
Coupler	Adjustable Forged 2-5/16"	Tire ST225/75 R-15 Load Range D		
Safety Chains	1/4" Grd. 70 w/Safety Latch Hook (2 each)	Wheel	Vheel 15" x 6"; White Spoke 6 Bolt	
Jack	7,000# Drop Leg (Bolted On)	Floor	2" Treated Pine or Douglas Fir*	
Tongue	5" Channel Fold Back/Wrap	Lights	L.E.D. D.O.T. Stop, Tail, Turn & Clearance	
Front Stop Rail	Fabricated Front Stop Rail	Elec. Plug	7-Way RV	
Frame	6" Channel	Finish (Prep) Steel is Cleaned to Ensure a Professional		
Crossmembers	3" Channel		Smooth Finish.	
Uprights	None	Finish	Superior Quality Finish is Applied for a	
Fenders	3/16" Diamond Plate Drive Over		Highly Decorative and Protective Finish.	


Standard Features

- · Rubrail and Tie Down Pockets Along Sides
- 36" Cleated, Self-Cleaning Dovetail
- 4' Tall Channel Stand Up Ramps
- Forged Adjustable 2-5/16" Coupler
- Fold Back/Wrap Tongue (14' & Longer)
- Set-Back, 7,000# Drop Leg Jack
- Fabricated Front Stop Rail
- EZ Lube Hubs
- Dexter Brand Axles
- Nev-R-Adjust Electric Brakes on All Hubs

- Cambered Axles
- 3/16" Diamond Plate Drive Over Fenders
- Full Width in Front & Behind Fenders
- Grommet Mount Sealed Lighting
- · L.E.D. Lighting Package
- Sealed Modular Wiring Harness
- Spare Tire Mount (Front)
- Complete Break-A-Way System w/Charger
- Radial Tires

Description

Dimensions					
Length	Α	В	С		
18'	218"	128"	90"		
20'	240"	138"	102"		
22'	264"	153"	111"		

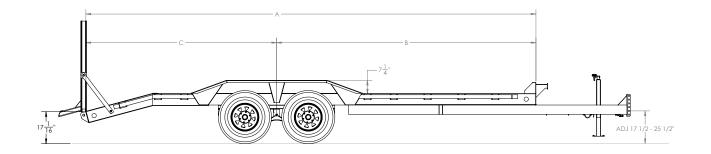



Model	Weight*	Description
10DF-18	3,200	83" x 18' Pro Series Tandem Axle Equipment/Car Hauler
10DF-20	3,330	83" x 20' Pro Series Tandem Axle Equipment/Car Hauler
10DF-22	3,650	83" x 22' Pro Series Tandem Axle Equipment/Car Hauler

^{*}Weights shown are for base models without options and are estimates only

Optional Equipment

Category	Description
COUPLERS	Adjustable Pintle in Channel in Lieu of Coupler
JACKS	12,000# Drop Leg Jack - Top Wind
JACKS	12,000# Drop Leg Jack - Side Wind Against Bed
BRAKES	Hydraulic Surge Brakes 2 Axles w/Adjustable Demco Actuator
TIRE/WHEEL	Spare Tire (ST225/75 R-15 LR-D)
TIRE/WHEEL	Tire Upgrade (ST235/80 R-16 LR-E)
TIRE/WHEEL	Spare Tire Upgrade (ST235/80 R-16 LR-E)
BODY	1/8" Diamond Plate Steel Floor (Per Square Foot)
CARGO CONTROL	Recessed D-Ring in Floor (Steel Floor Only)
CARGO CONTROL	B40 5/8" D-Ring (Each)
CARGO CONTROL	Additional Recessed D-Rings in Floor